

Slip Ring Bodies

SR 045015-03



- Voltage:
 - max 400v
- Current:
 - mA to 15A
- Slip rings:
 - Ø45 x 5.4mm,brass distance between rings 8 mm

SR 140250-03




- Voltage:
 - max 400v
- Current:
 - mA to 250A
- Slip rings:
 - Ø140 x 22mm,brass distance between rings 46 mm

SR 059030-03



- Voltage:
 - max 400v
- Current:
 - mA to 30A
- Slip rings:
 - Ø59 x 6.5mm,brass distance between rings 10 mm

SR 200400-03

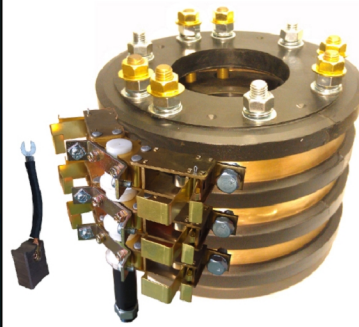

- Voltage:
 - max 400v
- Current:
 - mA to 400A
- Slip rings:
 - Ø200 x 22mm,brass distance between rings 40 mm

SR 074040-03



- Voltage:
 - max 400v
- Current:
 - mA to 40A
- Slip rings:
 - Ø74 x 8mm,brass distance between rings 13 mm

SR 074040-21



- Voltage:
 - max 400v
- Current:
 - mA to 40A
- Slip rings:
 - Ø74 x 8mm,brass distance between rings 13 mm

SR 074060-03




- Voltage:
 - max 400v
- Current:
 - mA to 60A
- Slip rings:
 - Ø74 x 14.2mm,brass distance between rings 19 mm

SR 074 060 - 03
Slip ring Cu Dim. Amp. Phase

Slip Ring Dimensions

B=rotate radius of body

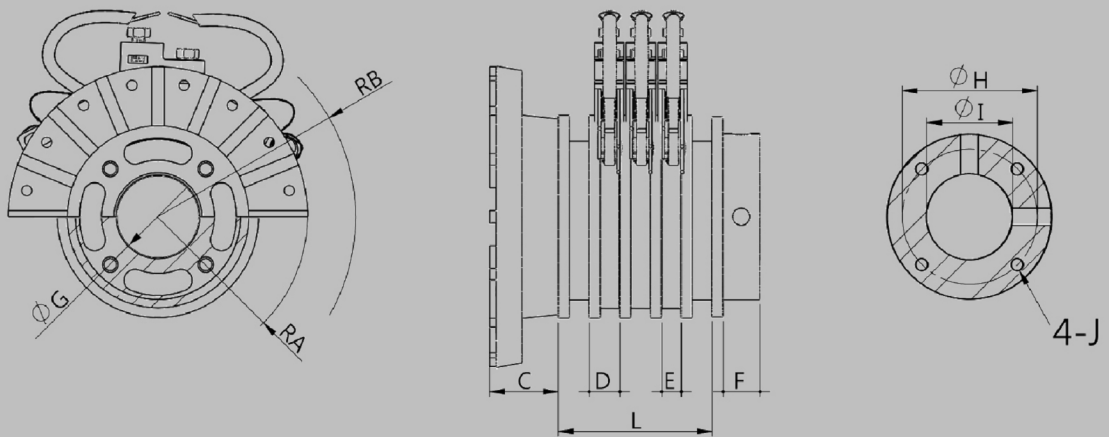


$L = (\text{number of phase} + 2) \times D$


unit: mm

Code Model	A	B	C	D	E	F	G	H	I	J
SR045015	35	70	14	8	5.5	15	17	30	20	M4x0.7x15
SR059030	46	70	29	10	6.5	15	26	41	30	M5x0.8x15
SR074040	61	85	28	13	8	15	33.5	55	35	M6x1.0x15
SR074060	61	85	28	19	15	15	34	55	35	M6x1.0x15

unit: mm

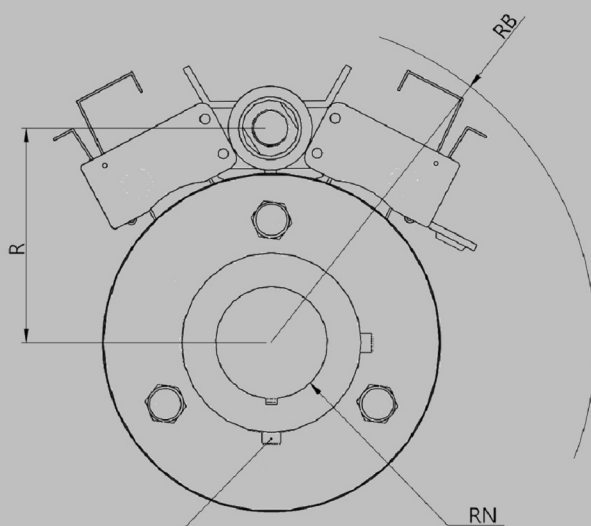

B=rotate radius of body

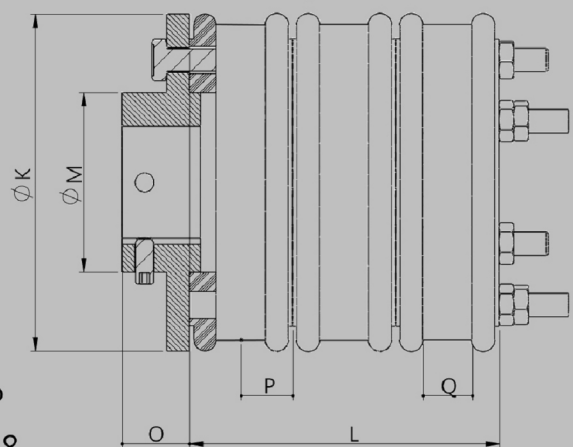

M8 x 1.0
 $L = \text{number of phase} \times 2P$
 (SR200400) $L = \text{number of phase} \times 2P + 18$

Code Model	B	K	M	N	O	P	Q	R
SR140250	150	150	80	25/30	30	23	22	110
SR200400	180	215	100	40	35	20	22	140