



3P Safety power rail

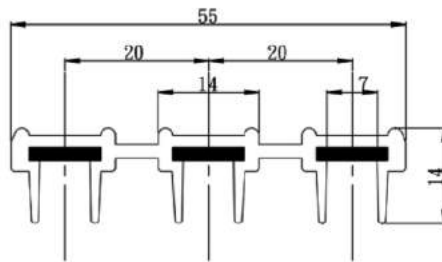


OFC 3N(99.9% ,good conductivity)

3P (Phase) Safety Power Rail			
Type	Capacity (A)	Width (mm)	Weight (Kg/m)
PWL-4-001	60	10	0.6
PWL-4-002	75	10	0.8
PWL-4-003	100	10	1.03
PWL-4-004	150	10	1.14
PWL-4-005	200	10	1.42





Use with C Track Support
and C Plate M10 Nut
30×20×5¹



PWL-4-006

3P Hanger Clamp

0.075 kg / pc

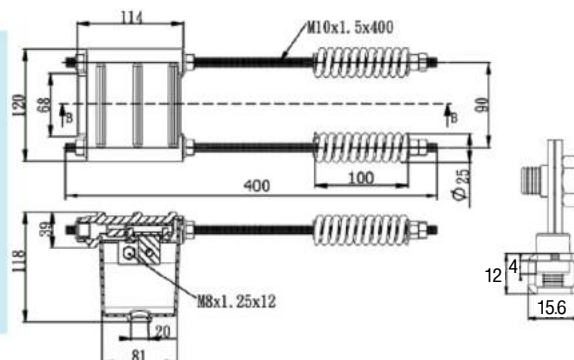


Fasten Block

Cancelled

3P End Tension & Power in

1.73 kg / pc

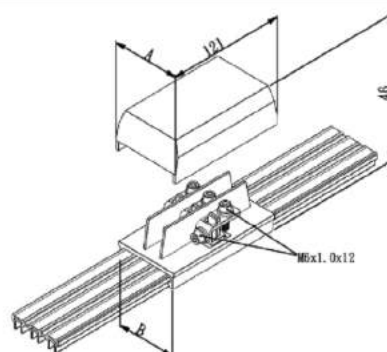


Type	Size	A	B
3P		70	62
4P		90	82
6P		130	122

PWL-4-012

3P Middle Power Feed-in

0.21 kg / pc

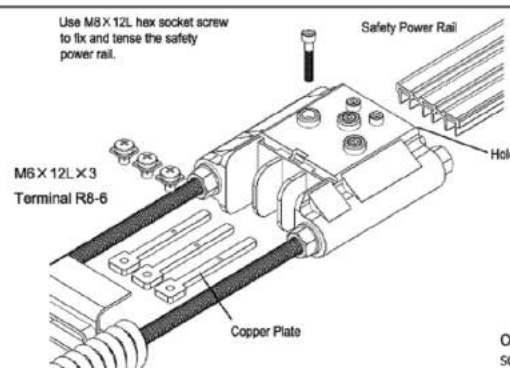

1. Insert safety power rail into the hole
2. Use M8 X 12L hex socket screw to fix and tense the safety power rail.
(only two and half cycle needed when screw meet the safety power rail)
3. Power lines fixed with terminals, and fasten the copper power plate.

Power rail PVC peel free!

PWL-4-007

3P End Tension & Power in

1.5 kg / pc

Only two and half cycle needed when screw meet safety power rail.